

# PRODUCT SHEET

REV 2.1 - EN202003

## H150 BECKY



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT253201902


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT253201901



SECURITY AREA

730

ROTATING

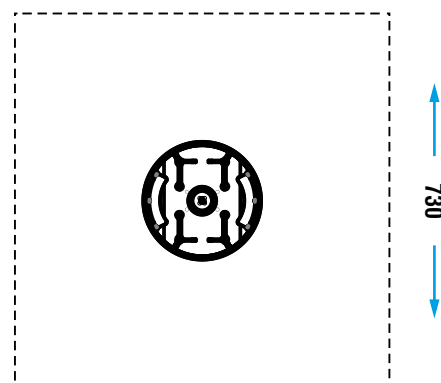

CATALOG COLLECTION	LET'S PLAY TOGETHER
DIMENSIONS (L x W x H) in cm	Ø230 x 85
MAXIMUM CFH	-
IMPACT ATTENUATING SURFACE	min. 56,25 m <sup>2</sup> - MAX 56,25 m <sup>2</sup>
SUGGESTED AGE OF USE	3+
COMPOSITION	<p>Aluminium treadplate sheet thickness 3+2mm with inspection window opening.</p> <p>Powder coated steel tubular structure with 15 or 19mm HDPE sheet decorations and seats.</p> <p>19mm HDPE sheet central steering wheel.</p> <p>Equipped with two central locations for wheelchair users and two lateral seats with backrest for accompanists.</p> <p>Every access is equipped with side guardpanels and two steel tubular barriers with bayonet locking system closing on the back of the user to avoid exit.</p> <p>Equipped with a speed limiter.</p>

**H150 carousel is an inclusive equipment, designed for users on a wheelchair and also able bodied ones.**

Once on deck, the wheelchair must be blocked with proper brakes.

Spinning of carousel must begin having an ablebodied tutor seating inside equipment. For this equipment the presence of a supervisor of the whole area is mandatory to prevent improper use of equipment and its damage.

*Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.*