

PRODUCT SHEET


REV 2.1 - EN202003

H153 DISMA



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT253201902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT253201901

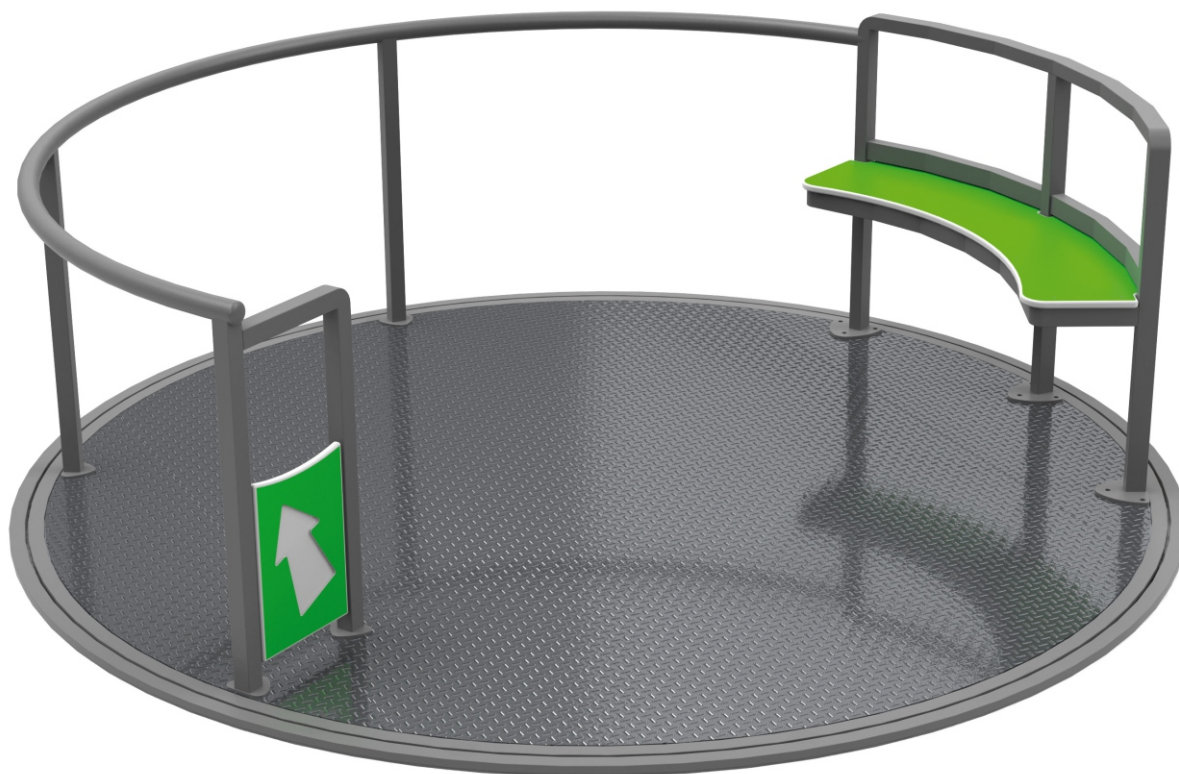


ROTATING



CATALOG COLLECTION	LET'S PLAY TOGETHER
DIMENSIONS (L x W x H) in cm	Ø230 x 85
MAXIMUM CFH	-
IMPACT ATTENUATING SURFACE	min. 56,25 m ² - MAX 56,25 m ²
SUGGESTED AGE OF USE	3+
COMPOSITION	Aluminium treadplate sheet thickness 3+2mm with inspection window opening. Powder coated steel tubular structure with 15 or 19mm HDPE sheet decoration and seat. Equipped with one central location for wheelchair users and one lateral seat with backrest for companions. Equipped with a speed limiter.

SECURITY AREA

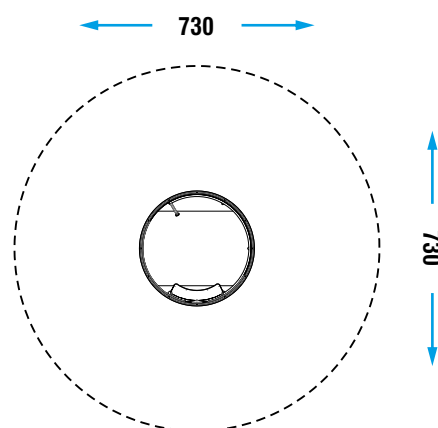

H153 carousel is an inclusive equipment, designed for users on a wheelchair and also able bodied ones.

Once on deck, the wheelchair must be blocked with proper brakes.

Spinning of carousel must begin having an ablebodied tutor seating inside equipment. For this equipment the presence of a supervisor of the whole area is mandatory to prevent improper use of equipment and its damage.

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.